EQUIPMENT SHEET

WPT-32
DRAIN STITCHER





MAIN DATA	
Equipment number	2204
Brand	HLS
Type	WPT-32
Drive	Single winch
Oil flow	460 l/min
Oil pressure	350 bar
Maximum speed	2.2 m/s


TECHNICAL DATA	
Hydraulic motor	HAGGLUNDS CA 50 50
Gearbox	HLS
Traction winch	800mm
Cable tensioner	Cylinder

BASE EXCAVATOR 35-40 TONS	
Type	330C, PC350LC-8, LH R944V
Maximum installation depth	30 m
Length stitcher	26.5 m
Weight	7.266 t
Penetration force	18 t

BASE EXCAVATOR 45-50 TONS	
Type	345C, 350, Hitachi 470
Maximum installation depth	30 m
Length stitcher	32 m
Weight	7.266 t
Penetration force wo cw	18 t

WPT-32
DRAIN STITCHER

LENGTH OPTIONS		
Drive unit section	10.0 m	5320 kg
Bottom section	2.40 m	341 kg
	4.40 m	501 kg
	5.70 m	734 kg
	9.70 m	1220 kg
Middle section	4.40 m	481 kg
	5.70 m	714 kg
	9.70 m	1170 kg
Top section	5.00 m	173 kg
Counterweight	2.40 m	3520 kg
	3.25 m	5800 kg

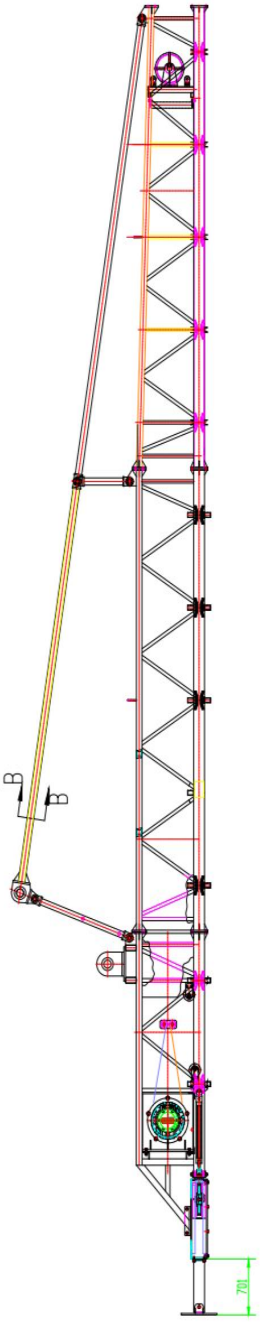

SIDEVIEW WPT-32

Guangzhou HLS Soft Engineering Foundation Co., Ltd

No.506,Panshan
Chaoneng Pioneer Park,No.
900,North Panyu Avenue,
Panyu,Guangdong,China.

Attention: Zhang Hengle

Tel: + 0086 15626264914

E-mail: chueng@hls-eng.com

Guangzhou HLS Soft Engineering Foundation Co., Ltd